

Network Cabinets

 **Wall Mount Cabinet**
Indoor

Wall Mount Cabinet - Indoor

RitchField Indoor Wall Mount Cabinets offer an advanced enclosure solution designed to meet the evolving demands of the IT industry. These versatile racks provide effortless installation, efficient cable management, seamless power distribution, and optimal airflow. They are specifically tailored to accommodate server computers and delicate precision electronic equipment, ensuring their safety and optimal performance.

Features

- Top quality steel with cover by electrostatic painted ensures the strong body and pleasing appearance. RAL9005/ RAL9004/RAL7035/ RAL7032 upon request.
- Closed type: Front door, quick release left and right side panels. Side panel can be locked to prevent theft(optional)
- Metal or glass door upon request.
- Both top and bottom cable entries are available
- 19" mounting rails are mounted inside
- Easy installation: wall mountable
- Package: assembled packaging or flat packing upon request.
- PDU can be added upon request (optional, to be ordered separately)
- Optional shelf for equipment is available (optional, to be ordered separately)
- Optional fans can be loaded for cooling (optional, to be ordered separately)


Standards

- Adhere to a variety of industry standards, including ANSI/EIA RS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, and GB/T3047.2-92.
- Compatible with metric measurements, ETSI standards, and the widely recognized 19-inch international standard.

Operation Conditions


Temperature	-5°C to 60°C
Humidity	≤85% at 30°C
Air Pressure	70kPa - 106kPa
Loading Capacity	60 Kg

Single Section

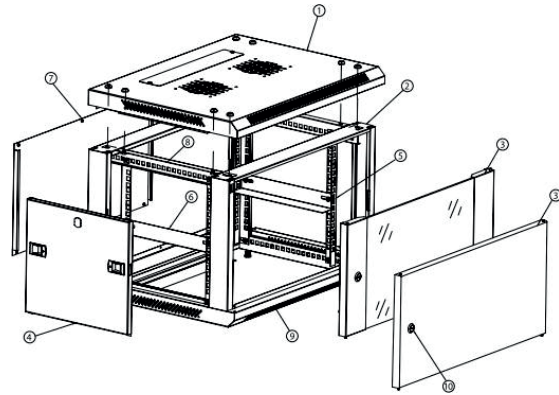

- | | |
|-------------------|-----------------------|
| 1: Top | 6: L-Supporting shelf |
| 2: Frame | 7: Rear door |
| 3: Front door | 8: Ledge |
| 4: Side panel | 9: Base |
| 5: Mounting rails | 10: Lock |

Double Section

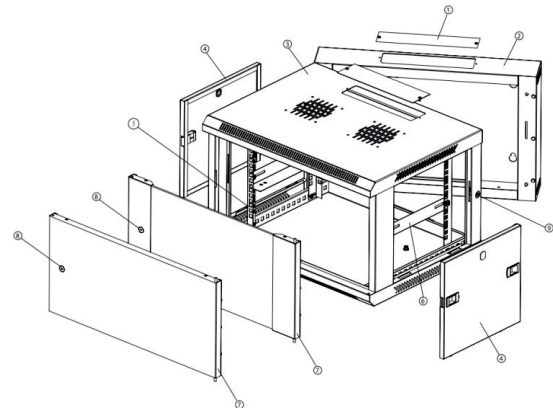

- | | |
|----------------------|-----------------------|
| 1: Cable inlet cover | 5: Mounting column |
| 2: Rear frame | 6: L-Supporting shelf |
| 3: Shell frame | 7: Front door |
| 4: Side panel | 8: Lock |


Accessories



Mounting Rail



Side Panel



Lock



6-way PDU (optional)



Brushless cooling fan (optional)

Ordering Information

Height (U)	Outer Width (mm)	Outer Depth (mm)	Outer Height (mm)	Inner Width (mm)	Inner Depth (mm)	Inner Height (mm)	Part Number
Single Section							
4	600	450	277.75	482.60	340.00	177.80	RF3-WMSS-0445-<D><CC>
6	600	450	366.65	482.60	340.00	266.70	RF3-WMSS-0645-<D><CC>
6	600	600	366.65	482.60	490.00	266.70	RF3-WMSS-0660-<D><CC>
9	600	450	500.00	482.60	340.00	400.05	RF3-WMSS-0945-<D><CC>
9	600	600	500.00	482.60	490.00	400.05	RF3-WMSS-0960-<D><CC>
12	600	450	633.35	482.60	340.00	533.4	RF3-WMSS-1245-<D><CC>
12	600	600	633.35	482.60	490.00	533.4	RF3-WMSS-1260-<D><CC>
15	600	450	766.70	482.60	340.00	666.75	RF3-WMSS-1545-<D><CC>
15	600	600	766.70	482.60	490.00	666.75	RF3-WMSS-1560-<D><CC>
18	600	450	900.05	482.60	340.00	800.10	RF3-WMSS-1845-<D><CC>
18	600	600	900.05	482.60	490.00	800.10	RF3-WMSS-1860-<D><CC>
Double Section							
6	600	600	366.65	482.60	390.00	266.70	RF3-WMDS-0660-<D><CC>
9	600	600	500.00	482.60	390.00	400.05	RF3-WMDS-0960-<D><CC>
12	600	600	633.35	482.60	390.00	533.40	RF3-WMDS-1260-<D><CC>
15	600	600	766.70	482.60	390.00	666.75	RF3-WMDS-1560-<D><CC>
18	600	600	900.05	482.60	390.00	800.10	RF3-WMDS-1860-<D><CC>

D = Type of Door : 1-Tempered Glass Door, 2-Side-Ventilated Tempered Glass Door 3-Perforated Metal Single Door 6-Solid Metal Single Door

CC = Color of the Cabinet : RL04 - RAL 9004

RL35 - RAL 7035

